


## Pigtail SM 1m

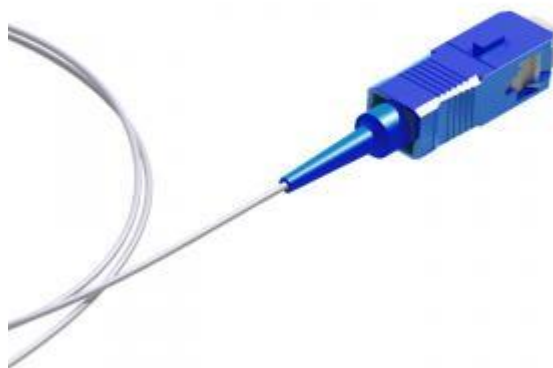

### Pigtail SM 1m

---

Singelmodus Pigtail for bruk i telecom og data nettverk, brukes også i høyhastighetsnettverk. Denne pigtailen er i henhold til IEC, EIA og TIA standardene. Pigtailen er terminert med en standard kontakt med beskyttelseshette på den zirkonia keramiske ferrulen. Standard kontakten gir optimal optisk ytelse.

### Egenskaper

---

- SC, LC, ST and FC Connectors
- UPC and APC Connectors
- Low smoke zero halogen (LSZH) buffer
- 900µm tight buffer or easy strip structure
- OS1/OS2 optical fibre conforms to ITU-G652.D, TIA/EIA 492 CAAA
- OS1/OS2 bend insensitive optical fibre conforms to ITU-G657.A1 or A2
- Different connector performance range for specific application
- Available in standard white colour buffer and also in standard 12 colours as per IEC 60304
- Available in standard and blister packing
- REACH, RoHS & SvHC materials compliant

### Applikasjoner

---

- Telecom and datacom application
- Patch panels, wall boxes, ODFs and splice cassettes
- Easy strip pigtails for on site installation
- Supports high speed multi channel video, data and voice services in metropolitan and access networks
- ATM, SONET and WDM

## Spesifikasjoner

---

### Spesifikasjoner kontakt

---

OPTICAL PERFORMANCE	SINGLEMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.25dB IEC	61300-3-4
Ave/Master	0.18dB IEC	61300-3-4
Ave/Random	0.18dB IEC	61300-3-34
Return Loss	55/65dB IEC	61300-3-6

### Spesifikasjoner kabel

---

CHARACTERISTICS	UNITS	SIMPLEX
Crush	N/100mm	500
Operating Temperature	°C	-20 to 60
Nominal buffer Diameter	µm	900 +/- 50
Max Tensile Load	N	6

### Bestillingsinformasjon

---

El Nr.	Part Name
6904383	Pigtail LC OS1 1m
6904387	Pigtail SC OS1 1m
6904391	Pigtail ST OS1 1m