


Skjøtehylse

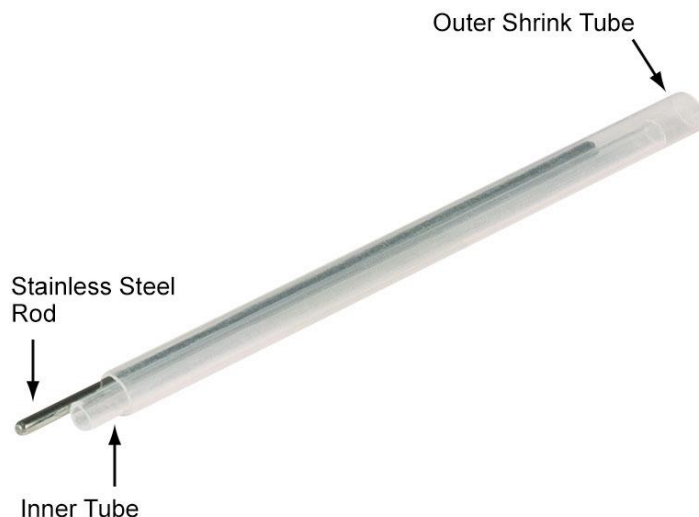

Skjøtehylse, klar, 45mm

Skjøtehylse brukes for å opprettholde styrken og stabiliteten til fiberen etter skjøting.

Spesifikasjoner

OPERATING TEMPERATURE


- -45°C to +100°C
- Minimum shrink temperature (full recovery): 120°C

SPECIFICATIONS

VALUES

Stainless Rod	301 Grades
Shrink Process	Heat to 125°C / maintain 80 seconds / cool
Outer Tube	Cross-linked polyolefin
Inner Tube	Ethylene Vinyl Acetate
Construction	Outer tube encloses and captures fusion tube and rod. Fusion tube centred in assembly

Teknisk tegning

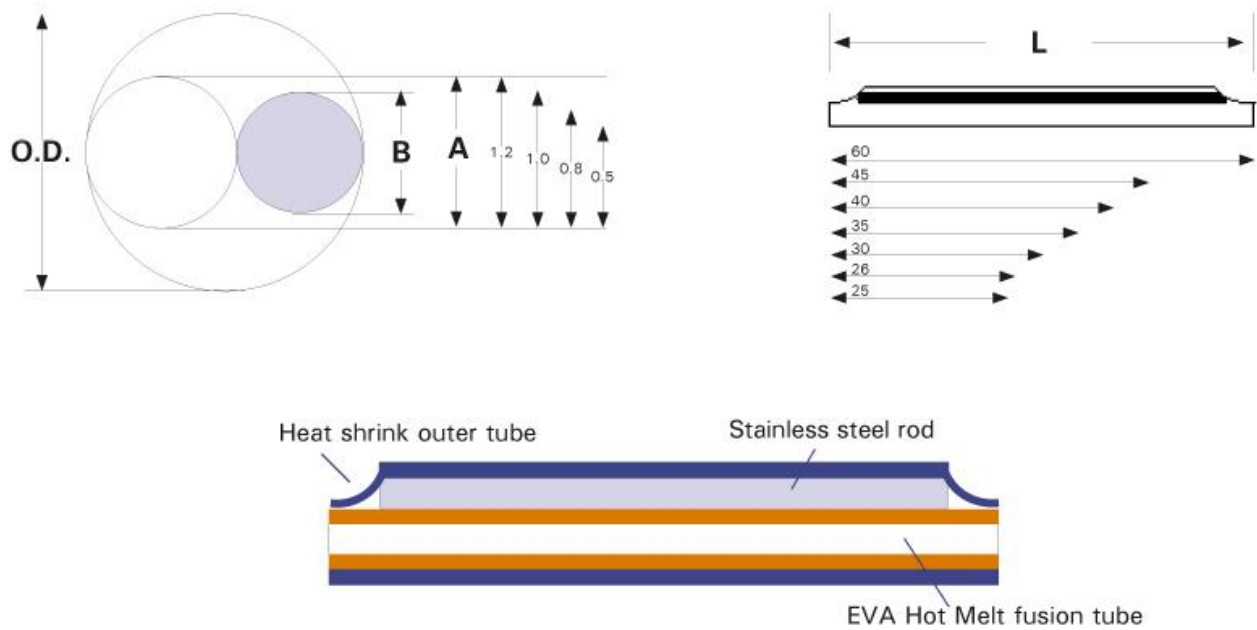

Bestillingsinformasjon

El Nr.	Part Name
6904392	Skjøtehylse 45mm klar